

# DAKTECH



## FEATURES



High-precision GPS/GLONASS tracking device



2 x Digital Inputs, 1 x Switched Ground Digital Output, 1 x Ignition Digital Input, Switched Power Out



I<sup>2</sup>C, SDI-12 and RS-485 Interface



Bluetooth® 5.0 Gateway for tagged asset management and sensor monitoring



Rugged and weatherproof IP67 Housing



Flexible Power Options – 4 x C Alkaline or LTC Batteries or wired to permanent power



Built-in Battery Meter for remote Battery Life Monitoring and Remaining Life Predictions

# Eagle

CELLULAR 2G OR 4G LTE-M / NB-IOT

## OVERVIEW

Advanced battery-powered or powered datalogger with GPS featuring an impressive array of inputs/outputs, sensor interfaces, and Bluetooth®. Interface with a range of devices, switches, and sensors to fit complex IoT applications.


## APPLICATIONS



Bluetooth® Low Energy Gateway



Sensor Monitoring

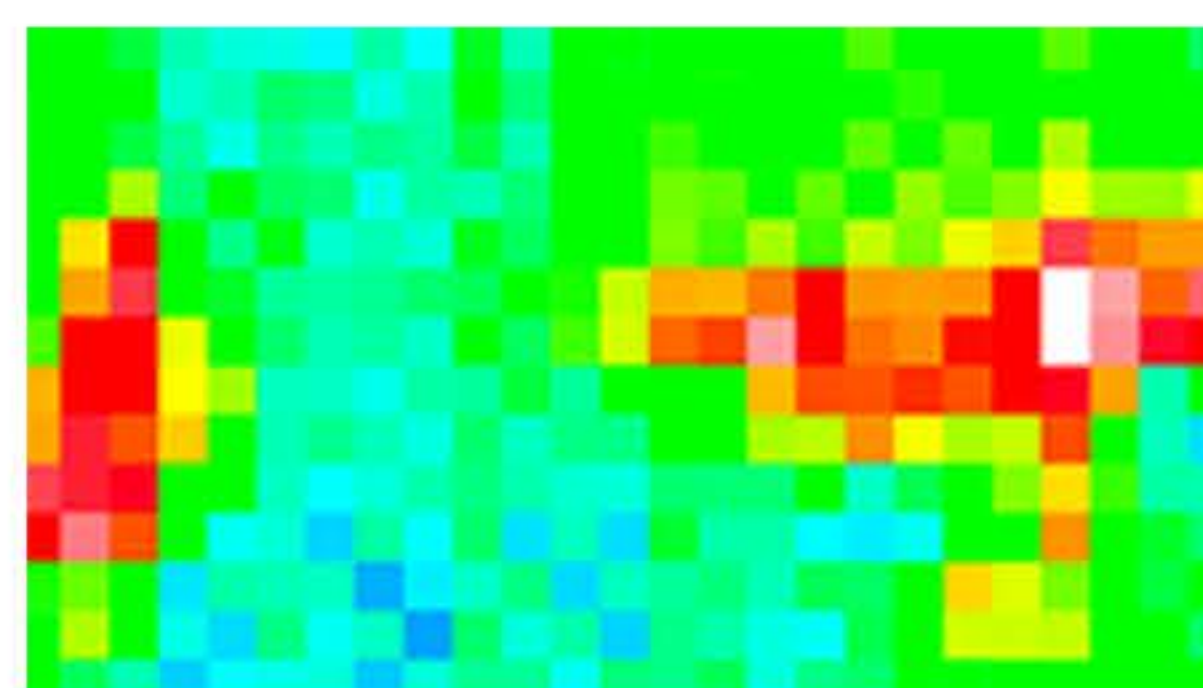

Infrared Thermal Sensors



Pulse Counting



Pump Control



Tank level Monitoring

DATASHEET

View more devices at [www.daktech.com.au/tracking](http://www.daktech.com.au/tracking)

## CONNECTIVITY

<b>2G</b>	2G: SARA-G350-02S-01 850/900/1800/1900 MHz
<b>4G LTE-M / NB-IoT</b>	uBlox SARA-R410M Modem operates on all major global LTE-M and NB-IoT bands.  Supported LTE bands: 1*, 2, 3, 4, 5, 8, 12, 13, 18, 19, 20, 26*, 28 (*roaming bands)
<b>BLUETOOTH® 5.0 GATEWAY</b>	Bluetooth® 5.0 gateway reports nearby Bluetooth® tags and sensors for affordable tagged asset management and sensor monitoring.
<b>SIM SIZE &amp; ACCESS</b>	Internal Micro 3FF SIM

## BATTERIES

<b>USER-REPLACEABLE BATTERIES</b>	4 x C
<b>SUPPORTED BATTERY TYPES</b>	Alkaline Lithium Thionyl Chloride (LTC)

## LOCATION

<b>MODULE</b>	uBlox EVA-M8
<b>CONSTELLATION</b>	Concurrent GPS / GLONASS
<b>CHANNELS</b>	72 Channel High Sensitivity Receiver
<b>TRACKING SENSITIVITY</b>	-167dBm industry-leading tracking performance
<b>ASSISTNOW OFFLINE</b>	GNSS aiding data (such as ephemeris, time, coarse position) for a faster Time To First Fix (TTFF).
<b>LOW NOISE AMPLIFIER</b>	GPS signals are boosted by a unique low-noise amplifier (LNA) allowing operation where other units fail.

## POWER

<b>INPUT VOLTAGE</b>	Flexible Power Options: 5 - 16V DC (max) 4 x C Cell Battery holder fitted. Screw terminals for line power.
<b>SLEEP CURRENT</b>	<10uA* *Average current in lowest power configuration
<b>BACK-UP BATTERY</b>	If line power is connected and batteries are also installed, device will fall back to the 4 x C cells if external power is disconnected.

## MECHANICS/DESIGN

<b>DIMENSIONS</b>	L 183 x W 145 x H 40 mm
<b>WEIGHT</b>	296g 564g with batteries
<b>HOUSING</b>	ABS Polycarbonate Plastic
<b>IP RATING</b>	IP67 rated housing ensures device can withstand fine dust, high-pressure spray, submersion for 30 mins in 1m of water, and extreme temperatures.
<b>INSTALLATION</b>	Multiple installation options for covertly and easily securing the device to assets with screws, bolts, cable ties, rivets, and more. Caters for a number of cable glands (2 fitted as standard) to allow for waterproof cable entry to the housing.
<b>OPERATING TEMPERATURE</b>	-20°C to +60°C  For operation in extreme temperatures, the device must be fitted with LTC Batteries.
<b>GPS ANTENNA</b>	Internal
<b>CELLULAR ANTENNA</b>	The Eagle has a U.FL connector on the PCB that connects to an internal cellular sticker antenna as standard. This offers the option of installing an external antenna if maximum range is required.
<b>3-AXIS ACCELEROMETER</b>	3-Axis Accelerometer to detect movement, acceleration, high G-force events, and more.
<b>DIAGNOSTIC LED</b>	Diagnostic LED signifies operation status.
<b>FLASH MEMORY</b>	Store weeks of records if device is out of cellular coverage. Storage capacity for over 10 days of continuous 30-second logging.

## INTERFACES

<b>ANALOG INPUTS</b>	2 x 0-30V Analog Inputs, Auto Ranging, 12-bit ADC 0-5V range: 1.22mV precision 0-30V range: 7.32mV precision
<b>DIGITAL INPUTS</b>	3 x Digital Inputs with configurable pull-up/down 0-48V DC input range On/Off thresholds: Pull-up enabled: low at 0.8V, high at 1.0V Pull-down enabled: low at 2.0V, high at 2.4V Can be used for pulse counting.
<b>DIGITAL OUTPUTS</b>	2 x Switched Ground Digital Outputs Easily wired up to control external devices and circuits, for example to turn a lighting tower on / off.
<b>IGNITION</b>	Digital inputs can be used as an ignition input to log run hours.
<b>I<sup>2</sup>C</b>	I <sup>2</sup> C (inter-IC communications) is an interface commonly used in sensor modules.
<b>RS-485</b>	RS485 interface supported in hardware. Requires firmware integration to connect to other sensors and devices.
<b>SDI-12</b>	Features SDI-12, commonly used in agricultural sensors and measurement devices for soil moisture probes, temperature, electrical conductivity (EC) of soils, water levels/pressures, other SDI-12 probes and sensors.
<b>SWITCHED POWER OUT</b>	Used to control the 3.3V power to external sensors and peripherals. Load limited and short circuit protected.
<b>SWITCHED SENSOR POWER</b>	Sensor Power (Vout) Used to control the battery power to external sensors and peripherals. Load limited and short circuit protected. Output voltage is the same as supply voltage. Current limited to between 570 and 850mA.
<b>4-20mA INPUTS</b>	2x 4-20mA The 4-20mA inputs can be used to interface to current loop sensors. 0.025mA precision.

# Eagle

## SMARTS

<b>AUTO-APN</b>	Auto-APN allows the device to analyze the SIM card and select the correct APN details from a list that is pre-loaded in the device's firmware.
<b>BATTERY LIFE MONITORING</b>	Built-in Battery Meter for monitoring battery use and remaining life predictions.
<b>ENVIRONMENTAL MONITORING</b>	Interface with a range of sensors such as temperature, humidity, moisture, depth, and more.
<b>GEOFENCING</b>	Create custom geofences and alerts if an asset enters or leaves specific locations.
<b>GEOFENCE DOWNLOAD TO DEVICE</b>	Geofences can be downloaded directly to the device from Telematics Guru for enhanced location-based actions and alerts. Maximum of 100 Geofences with up to 100 points per geofence.
<b>IMPACT DETECTION</b>	Configure impact-detection alerts when g-forces are exceeded by a user-defined threshold.
<b>PERIODIC OR MOVEMENT-BASED</b>	Configure parameters to send updates based on set time intervals (1x, 3x, 5x a day, etc) or when movement occurs. Adaptive tracking technology detects when the device is on the move and increases the update rate, providing detail when you need it while conserving battery when stationary.
<b>PREVENTATIVE MAINTENANCE</b>	Set reminders based on distance traveled and run hours to reduce maintenance and repair costs.
<b>THEFT RECOVERY</b>	Switch to Recovery Mode in the case of theft or loss to activate real-time tracking at 30-second intervals for asset retrieval.
<b>RUN HOUR MONITORING</b>	Capture run hours based on movement to understand and optimize asset utilization.
<b>SLEEP MODE</b>	Stationary devices enter sleep mode, switching the update rate to only twice per day until movement occurs to conserve battery life and optimize data usage.

## DEVICE MANAGEMENT

<b>FLEXIBLE CONFIGURATION</b>	Configure device parameters such as heartbeat rate, movement and accelerometer settings, and more to fit any tracking application.
<b>OEM SERVER</b>	Manage, monitor, configure, debug, update, and restart devices remotely from our cloud-based device management system.

## INTEGRATION

<b>THIRD-PARTY INTEGRATION</b>	Webhook, TCP or HTTPS, Direct and Data Splitting Integration Options
--------------------------------	--

## SECURITY

<b>DATA SECURITY</b>	Military-level AES-256 Encryption from device to OEM Server to protect the integrity and confidentiality of telematics data.  Data forwarded to third-party systems is sent via HTTPS for end-to-end security.
----------------------	--

## WARRANTY

<b>MANUFACTURER'S WARRANTY</b>	One year manufacturer's warranty.
--------------------------------	-----------------------------------

## CERTIFICATIONS

Please contact us for a full list of compliance specifications and documentation for your region.

**4G** - Bluetooth® Certified, CE (Doc)  
**2G** - Bluetooth® Certified, CE (Doc)



# Eagle

View more devices at [www.daktech.com.au/tracking](http://www.daktech.com.au/tracking)

TECH SPECS